


## DOOR CONTROL

### GAS FLAP DOOR STAY

#### FEATURES

- 100 Newtons Strength
- Note: Do not apply petroleum based lubricants
- Instalment:
  - Door Fixed Location: 55mm
  - Side Panel Fixed Location: 260 +2mm/-2mm
  - Cabinet Depth Location: 28mm

Item Code	Strength	Length	Quantity
GA100	100 Newtons	312mm	Each

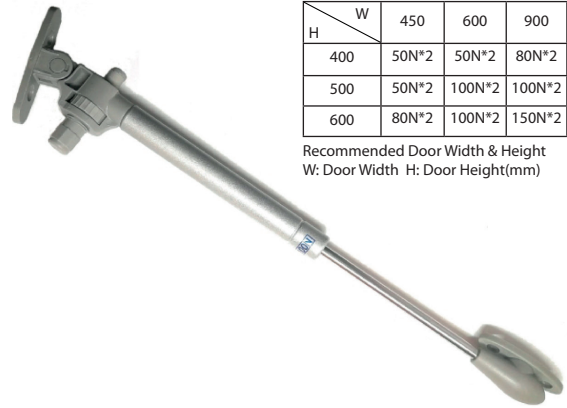

H \ W	450	600	900	1200
400	50N*2	50N*2	80N*2	100N*2
500	50N*2	100N*2	100N*2	150N*2
600	80N*2	100N*2	150N*2	N/A

Recommended Door Width & Height  
W: Door Width H: Door Height(mm)

### EZI FOLD DOOR CONTROL ARMS

#### FEATURES

- New Zealand Made
- Simple system for bi-fold doors
- White Plastic
- Average install time of 5 minutes
- EZI330 commonly for deeper units (base cabinets etc)
- EZI530 commonly for larger opening (pantries, closets etc)

Item Code	Length	Quantity
EZI330	362mm	Each
EZI530	562mm	Each



#### Ezi Fold Door Examples:

