


ALUMINIUM FRAMED GLASS DOORS

Very popular in modern kitchen designs. We custom manufacture any size, from a range of different profiles, lots of glass options and hardware drilled for and supported as required.

FFATURES

- Made to order
- Available in four different profiles:
 - Fineline 50×20 mm
 - Twinline 50 x 20mm
 - Squareline 20 x 20mm
 - Broadline 50 x 20mm
- Available in Standard Anodised & Powder Coating (Dulux & Interpon Colour Range) for all profiles and Black Anodised in Squareline and Fineline profiles only
- Glass options including Etchlite (frosted), Clear and others
- Drilled for Blum hardware unless otherwise requested
- Enko order form must be completed for all quotes and orders https://enko.nz/custom-made-aluminium-framed-glass-doors

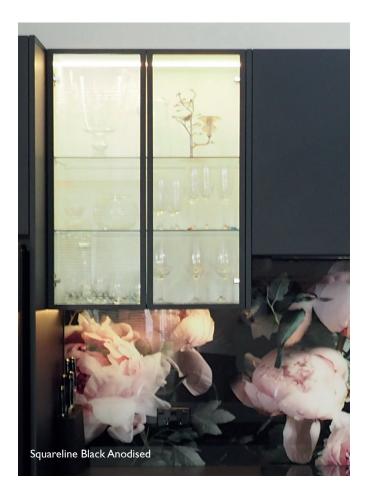







Aluminium Framed Glass Door Quote / Order Form

Deliver to:				Job No:				
Company Name: Street Address: City:				Order No: Date Required:				
				Contact Person:				
					SANGER CISON.			
Please Select the Rec	uired Profile:							
SQUARELINE BROADLINE				TWINLINE				
↑ 50 ↑ 50				25			FINELINE **SI ** **I ** **I ** ** ** ** ** **	
20.2	20.2							
20	' ↓	50		+		2	20.2	
CS20	☐ CB45			□ CH45			50	
Door No. Height	Width	Qty	L/H	R/H	Std Door	Di E I I		F45
1				14.1	3td D001	Bi-Fold	Flap	Panel
2								
3								
4								П
Finishes:	Standa	rd Anodised	d (all profiles) \square Black	Anadicad (C	!'		
					Anodised (S Range (all pro	quareline +	Fineline Pro	files Only)
Glass Type:		Other, please						
Cabinet Panel Thicknes	is: 🗌 16mm		18mm F		o men, predat	- Harrie.		
Hinges:	Full Ove	erlay	Half Ove		nset	Do not supp	alv	
ssembly: Kitset (No Glass) Assemb				led Drill for hardware				
Flap Door: Bi-Fold Hardware:		tays to suit			Do not suppl			
or-rold Hardware:	h: 2400mm							
f VOLL roquing diff-							10011111	
f you require different hing lease alter dimensions on	Inis arawina			Hi	nge Position			
dditionally, if they alter per door, send one order per door tandard position is 100mm in from either end of hung edges.				Hinge Positions:				
tandard position is 100mr	n in from either	end of hung	g edges.	Minimum dis	100mm	┤ <u></u> ┼	_ 井┌──ï	+
lass Size Deductions: S20 - Overall door less 27r	mm			-			ᅫ片국	- 1
B45 - Overall door less 87r	nm			req	e hinge position uired or enter	t <u></u>	기片	- 1
H45 - Overall door less 39r F45 - Overall door less 6mi	mm m			-	your own		╗╅	L
ass: We only use toughen	ed alacc				87mm	†		_
etailed drawing MUST be s andle holes required for gl	supplied showing	ng position o	of any		100mm		1 1	
	ass.			Distance to hing		Up to	Up to Up	.
mate notes required for gi				from edge or do	or and	1000		
mare notes required for gi				from edge or do	900 900	1600	2000 240	
	IAIL: sales@enk			from edge or do	900 900	1600		







