


Mechanism for column extractable with kit of full extension slides with soft, capacity 120 kg, complete with brackets for fixing door.



TOOLS

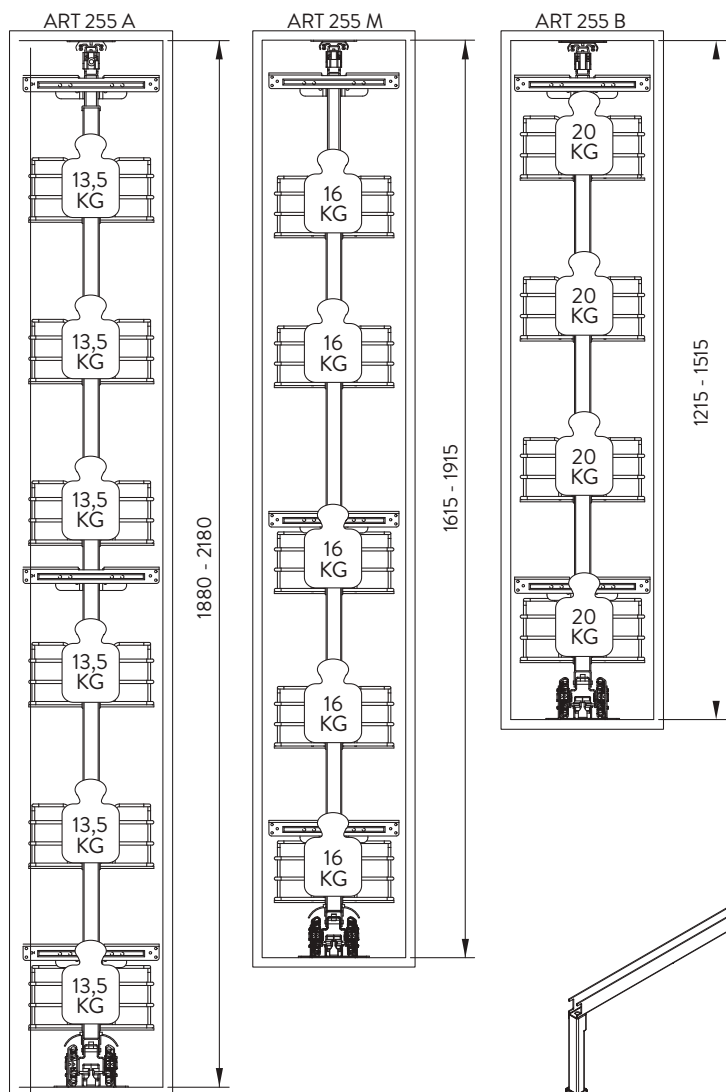




FITTINGS

24 x 3.5X18 Self-tapping screws
1 x M6X16 Screw
1 x M6X25 Screw
3 x M5X15 Screw
1 x Ø3 Key hexagonal

PARTS

- A. 1 x Lower frame
- B. 1 x Upper frame
- C. 1 x Shallow bottom runner
- D. 1 x Upper runner
- E. 1 x Door bracket
- F. 1 x Door bracket frame
- G. 1 x Fixing support
- H. 1 x Cover



ATTENTION NOT SUPPLIED

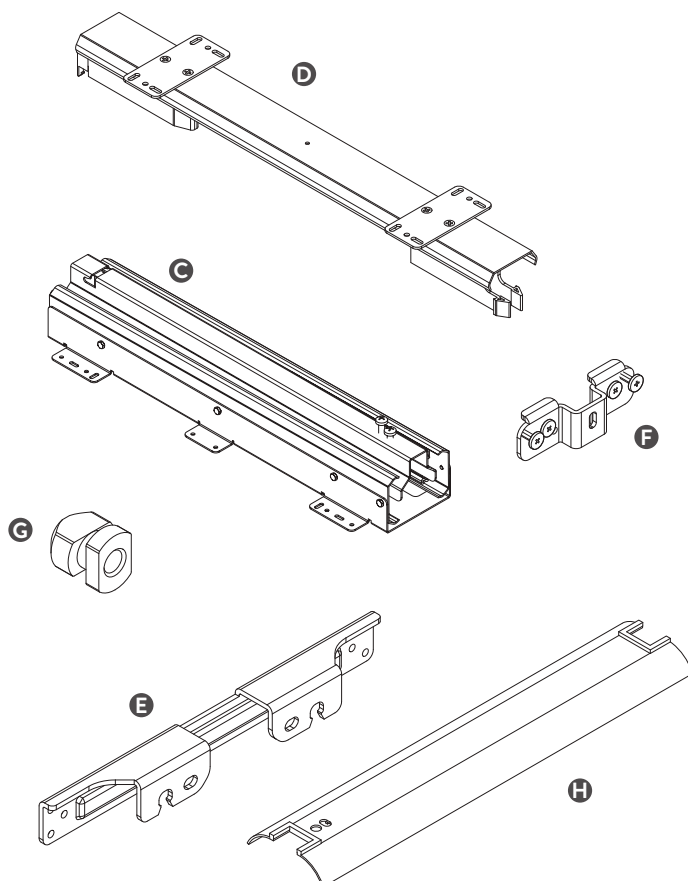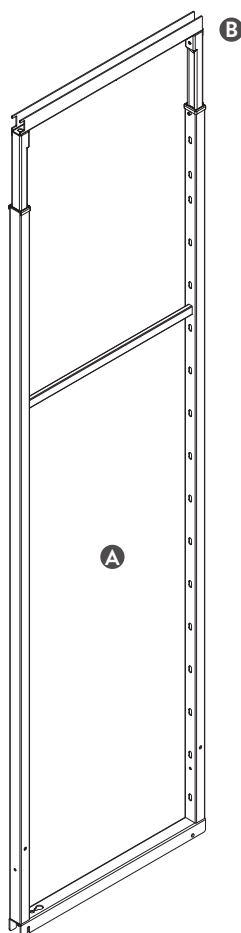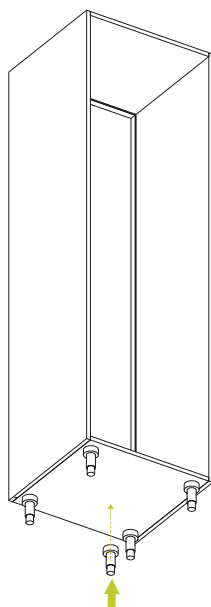

8 x 3.5x18





Set the shallow bottom runner C respecting the distances and with fix the screws provided.

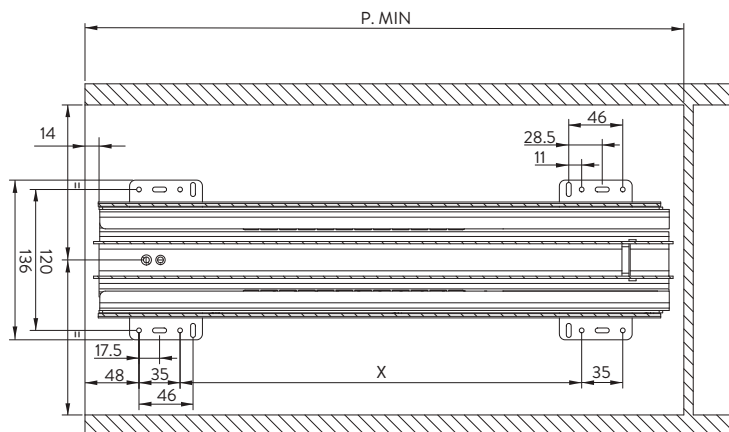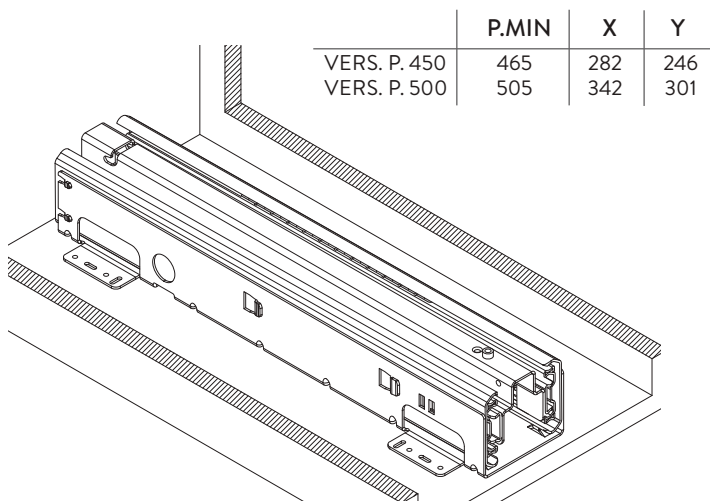

4 x 3.5x18




Set the upper runner D respecting the distances and fix with the screws provided.

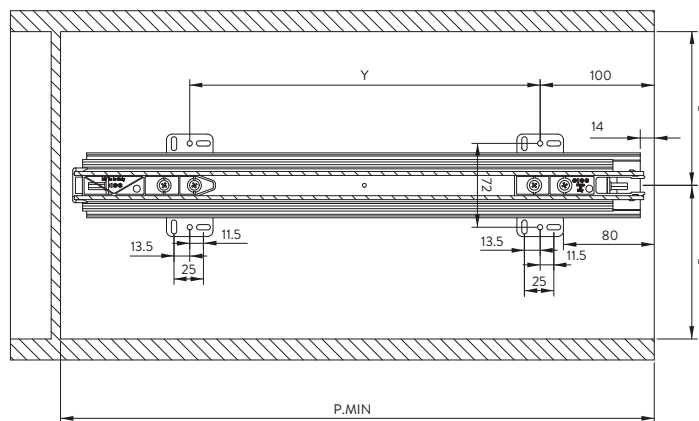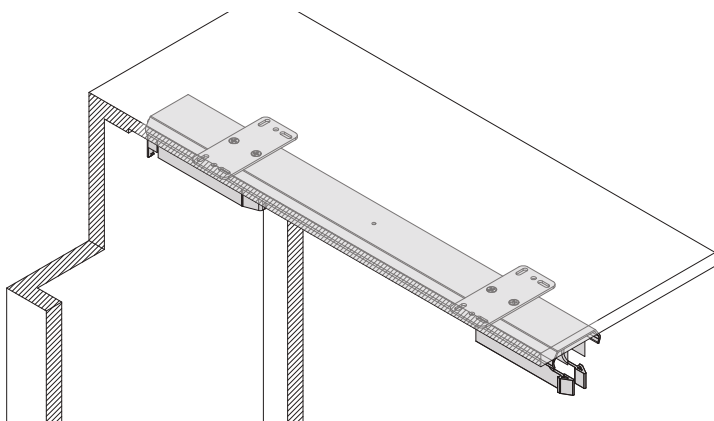

1 x M6x16 & 1 x M6x25



Fix the adjusting screws on the shallow bottom runner C (see the picture).

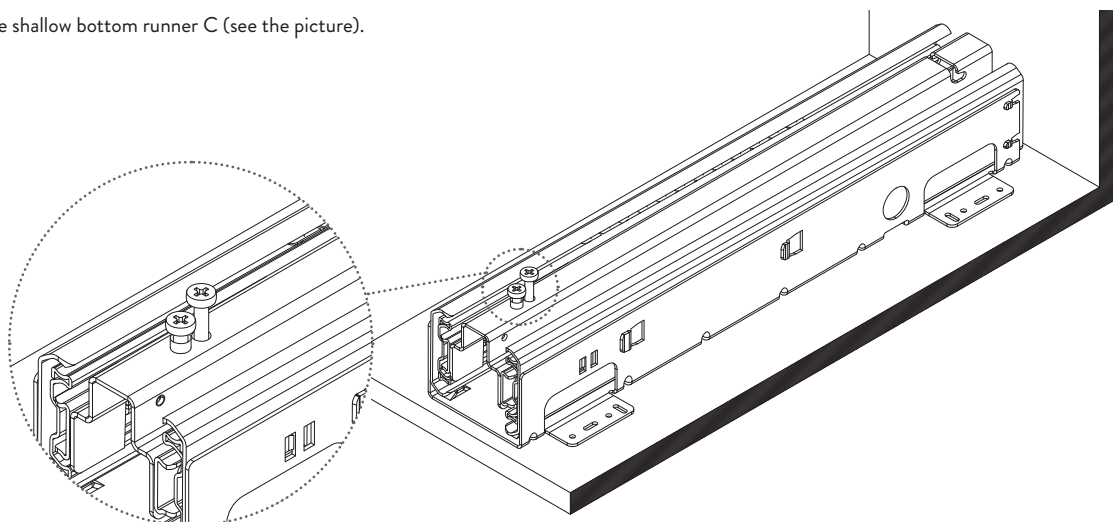

1

2

3

4

Fix the frame A in the shallow bottom runner C open and tighten the screws (see the picture 1).





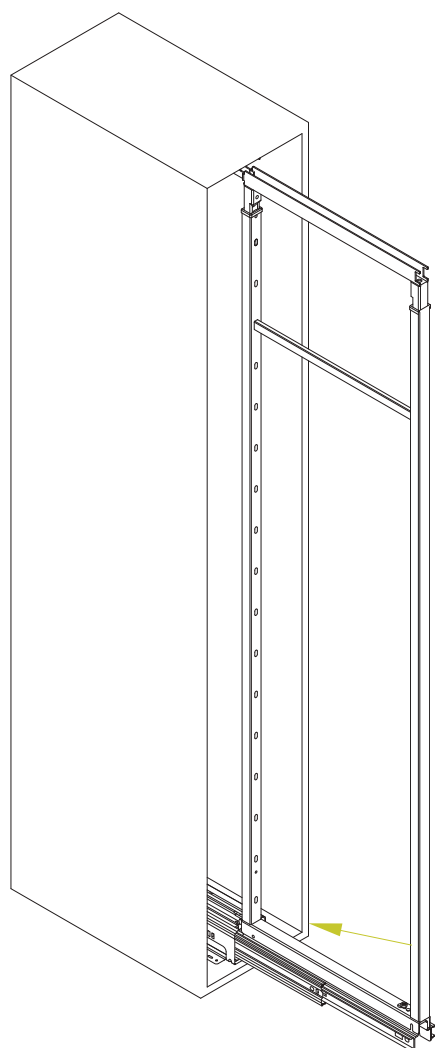


FIG.1

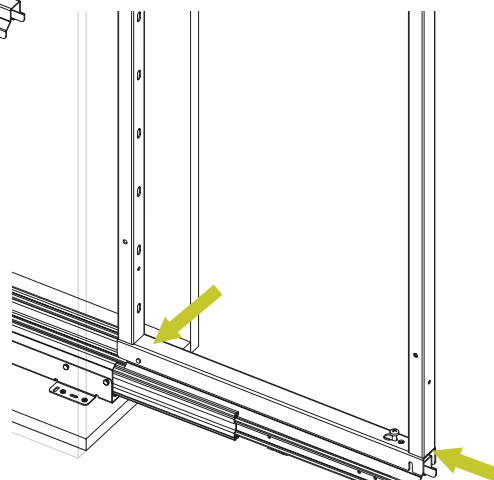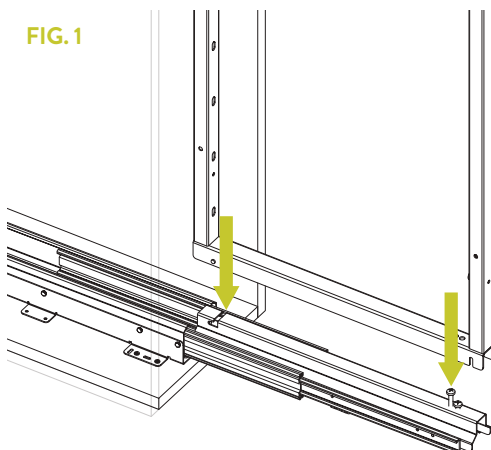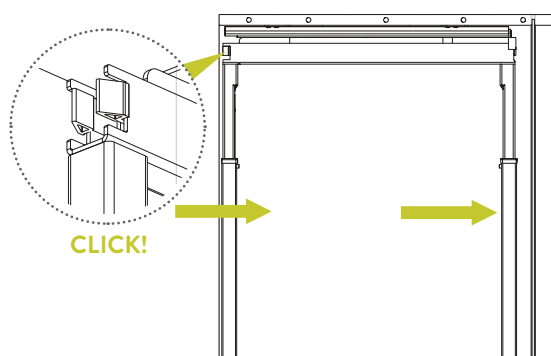


5

Loosen the grains "N" (on the frame A) and slide up the frame B. Block the frame B at the indicated measure by tightening the grains "N". Slide the frame A,B into the top slide D until "Click!" to install.

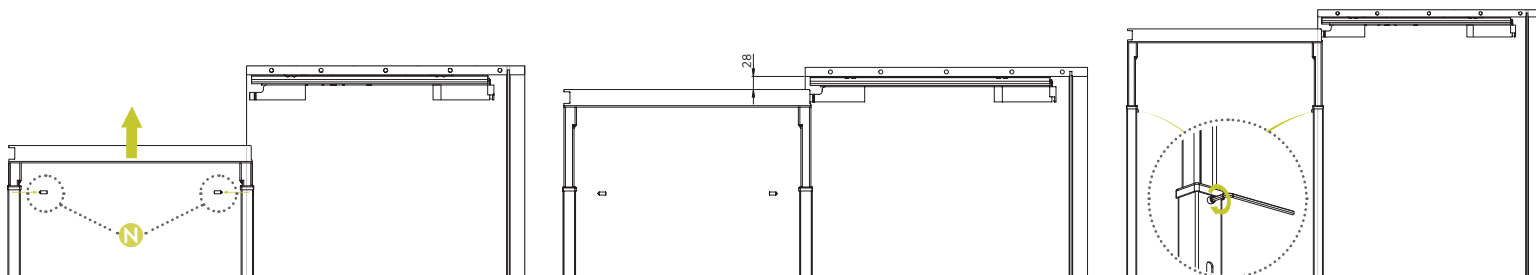

6



Set the special fixing support G in the frame hole A (see the picture sequence).

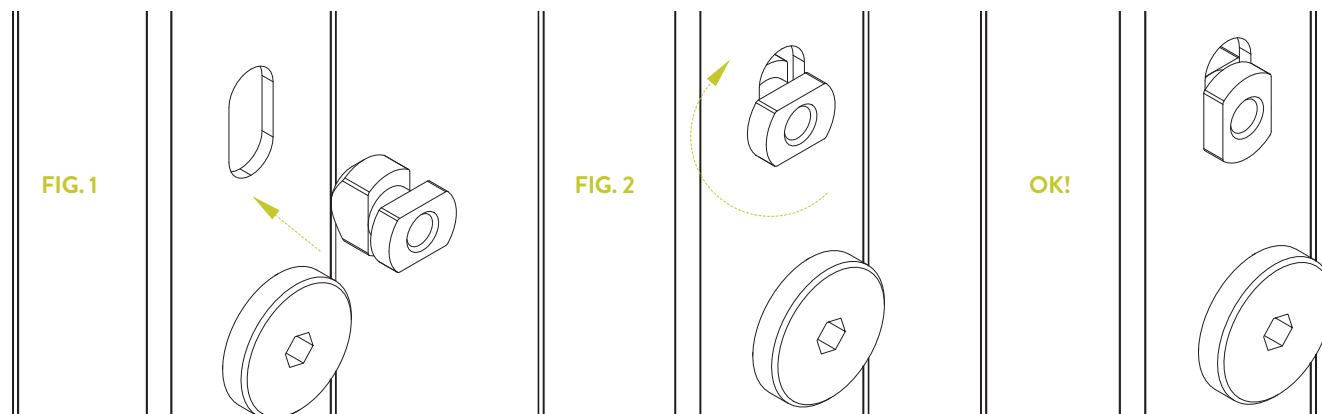

3 x M5x15



Set the door brackets frames F and fix with the special screw.

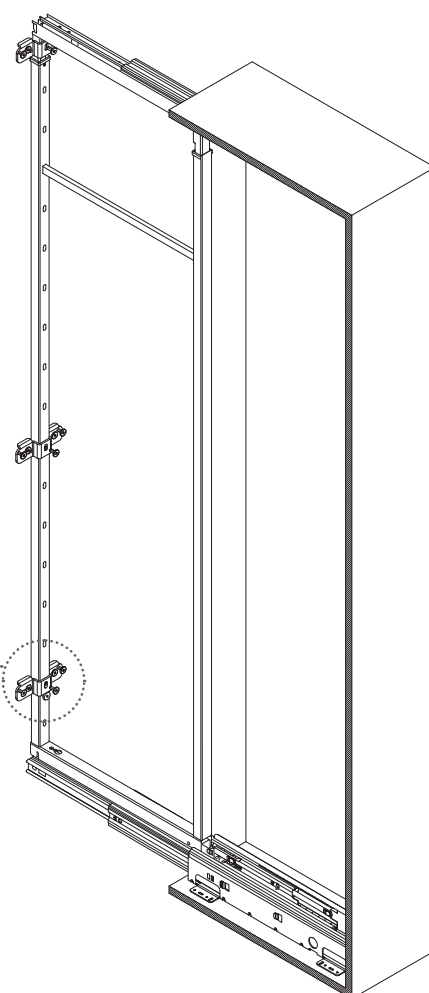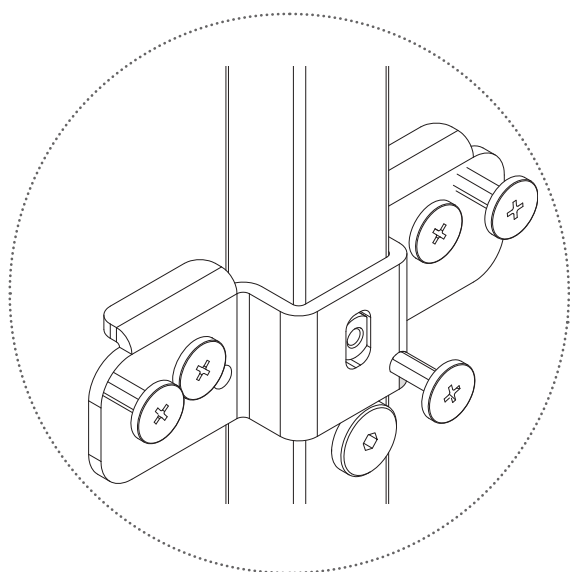


7





12 x 3.5x18









Assemble the door bracket E on the door respecting the distances and set it on the door bracket frame F, already assembled.


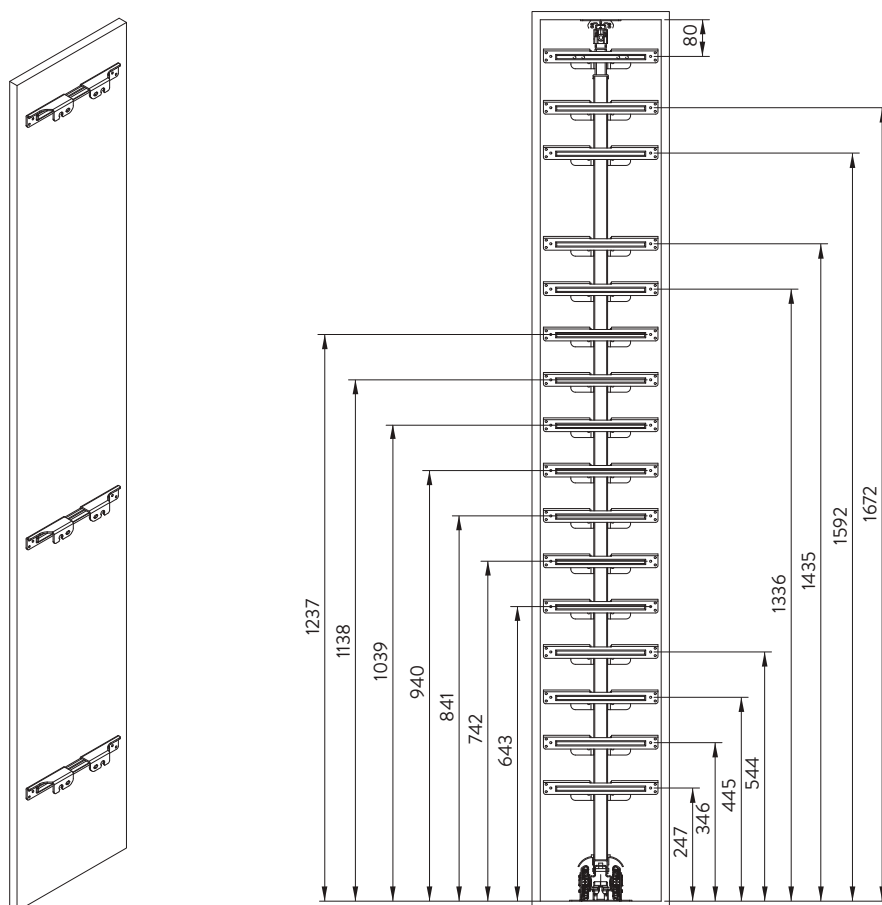


	Z
L 300	218
L 400	318
L 450	368
L 500	418
L 600	518

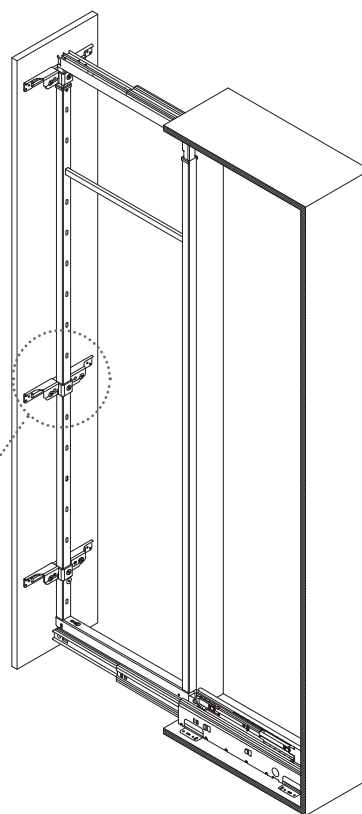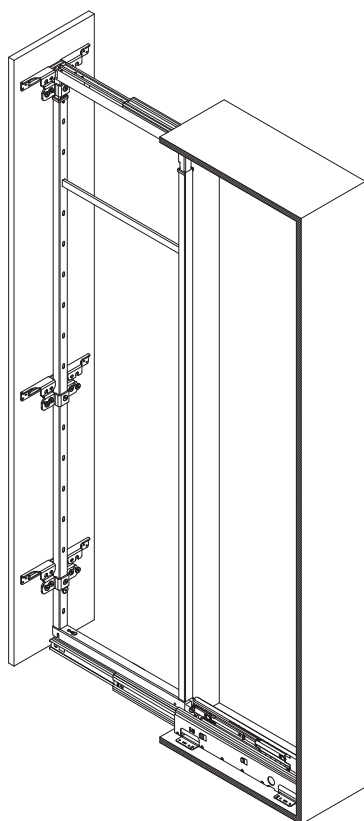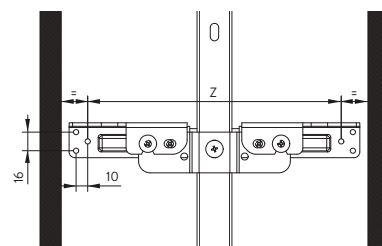

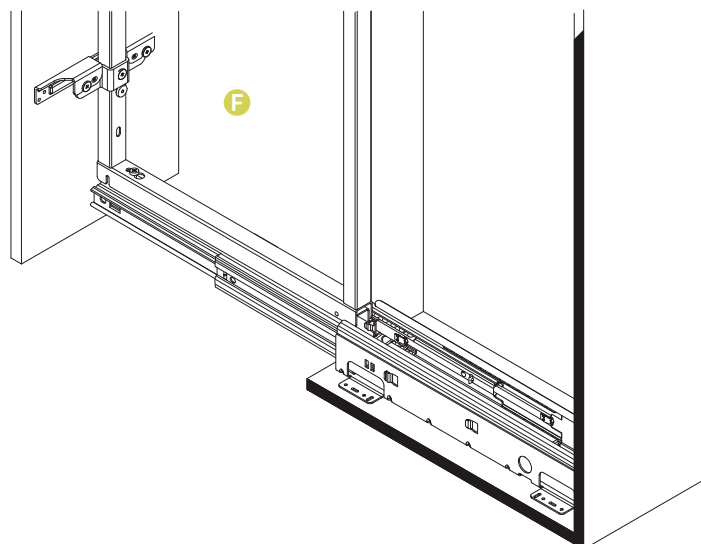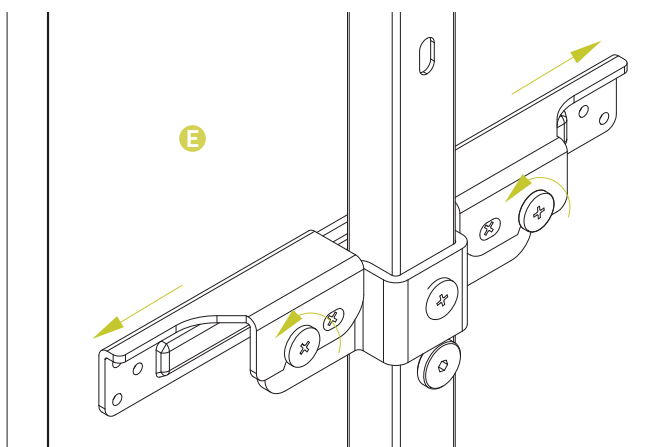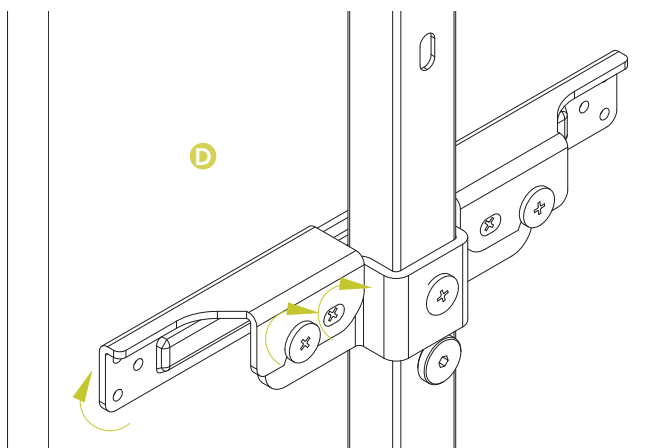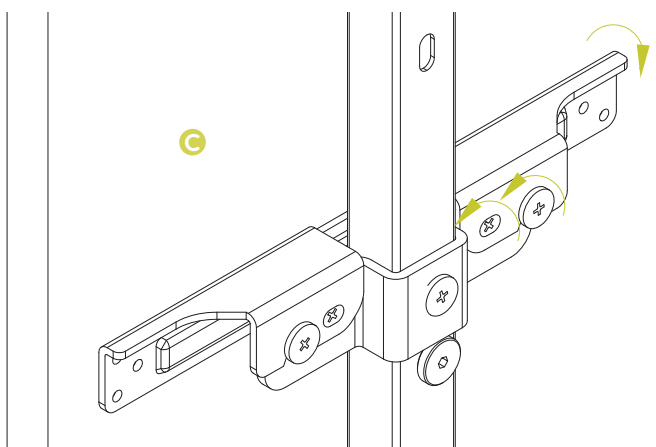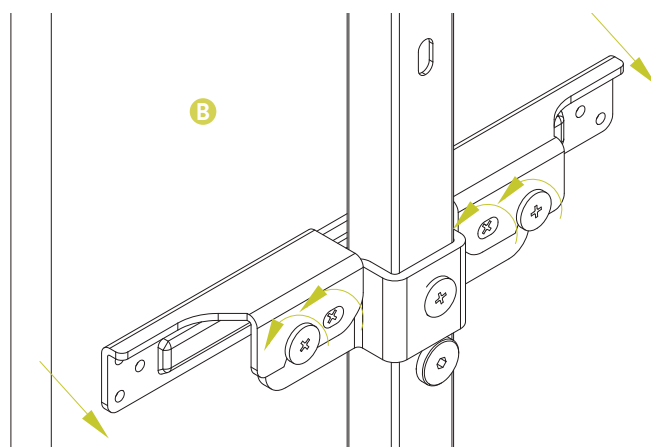
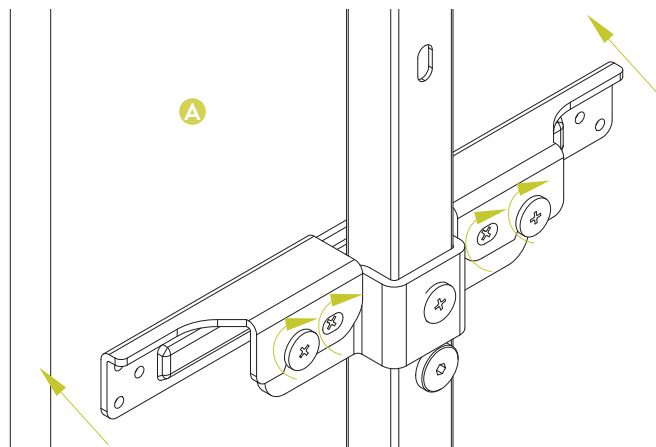


To make the regulation H loosen all the screws of the fixing support F and work on the eccentric situated in the lower part.

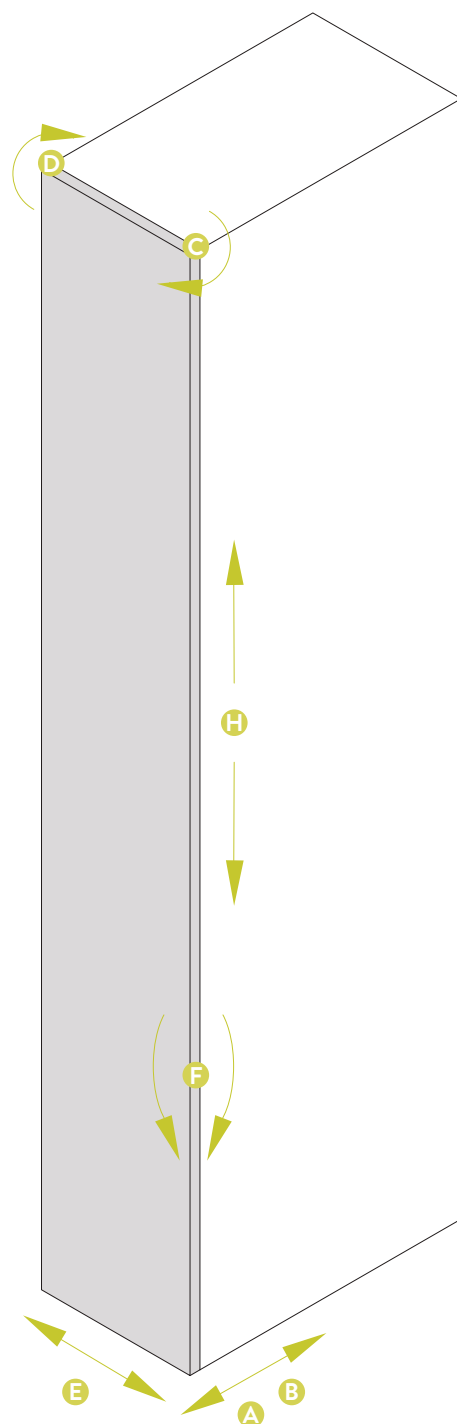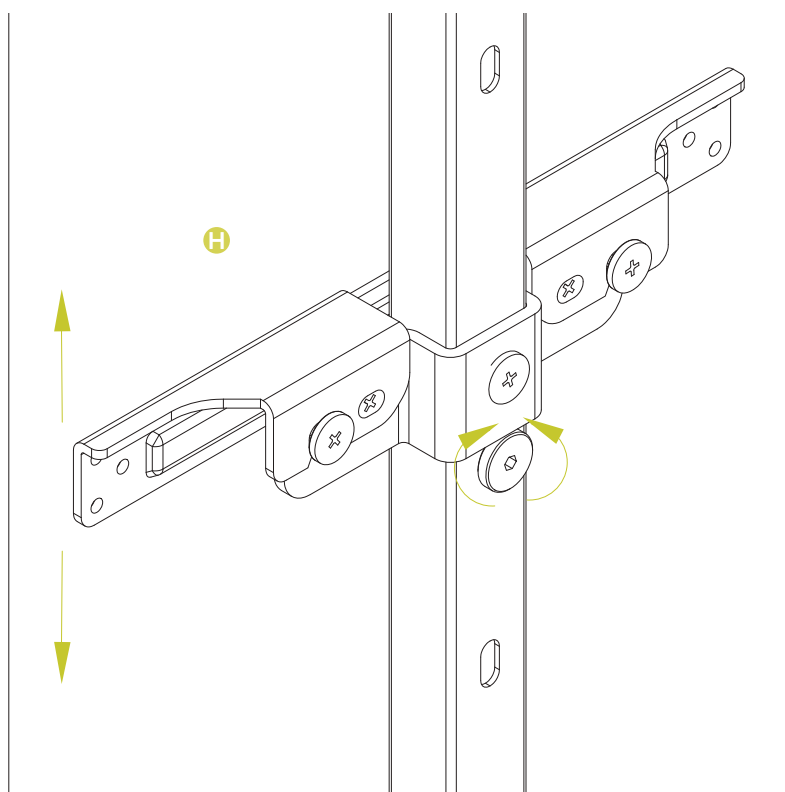


- A-B: Ahead/Back
- C-D: Rotation
- E: Right/Left
- H: High/Low
- F: Regulation door inclination

Insert the cover on the slide.

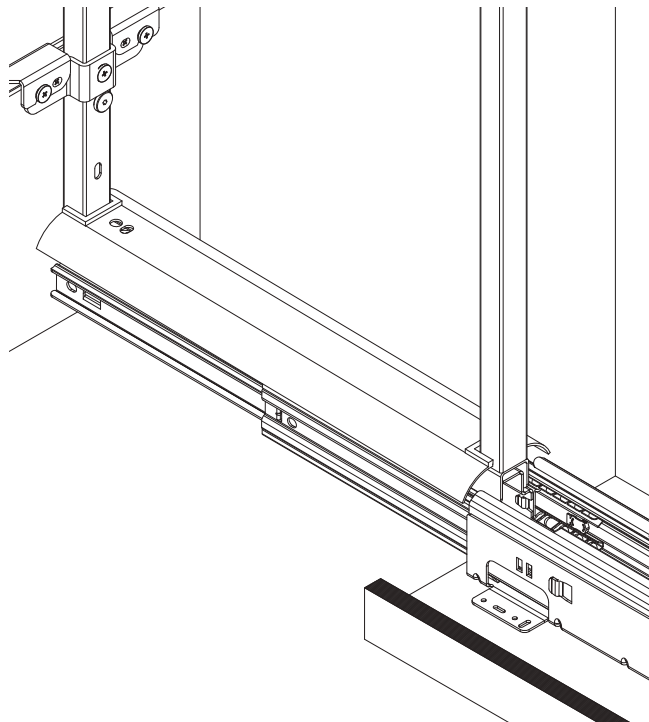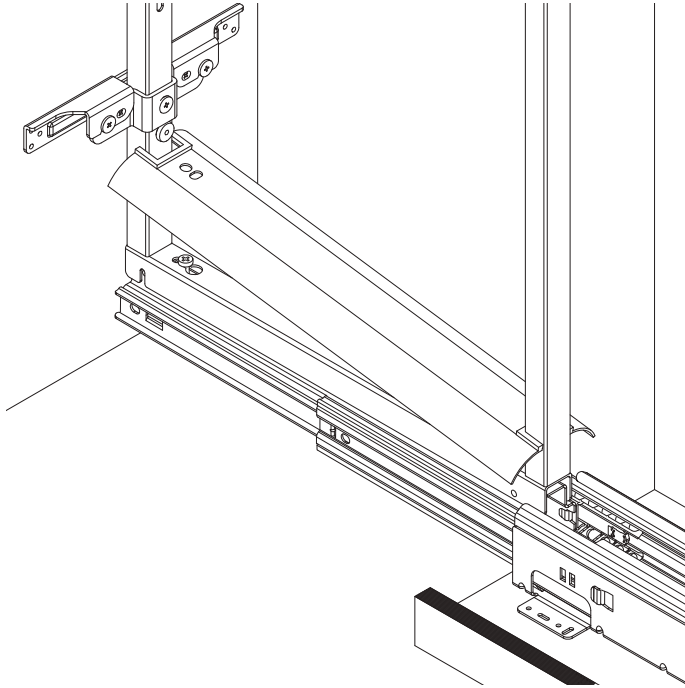


Proline Baskets

ASSEMBLY

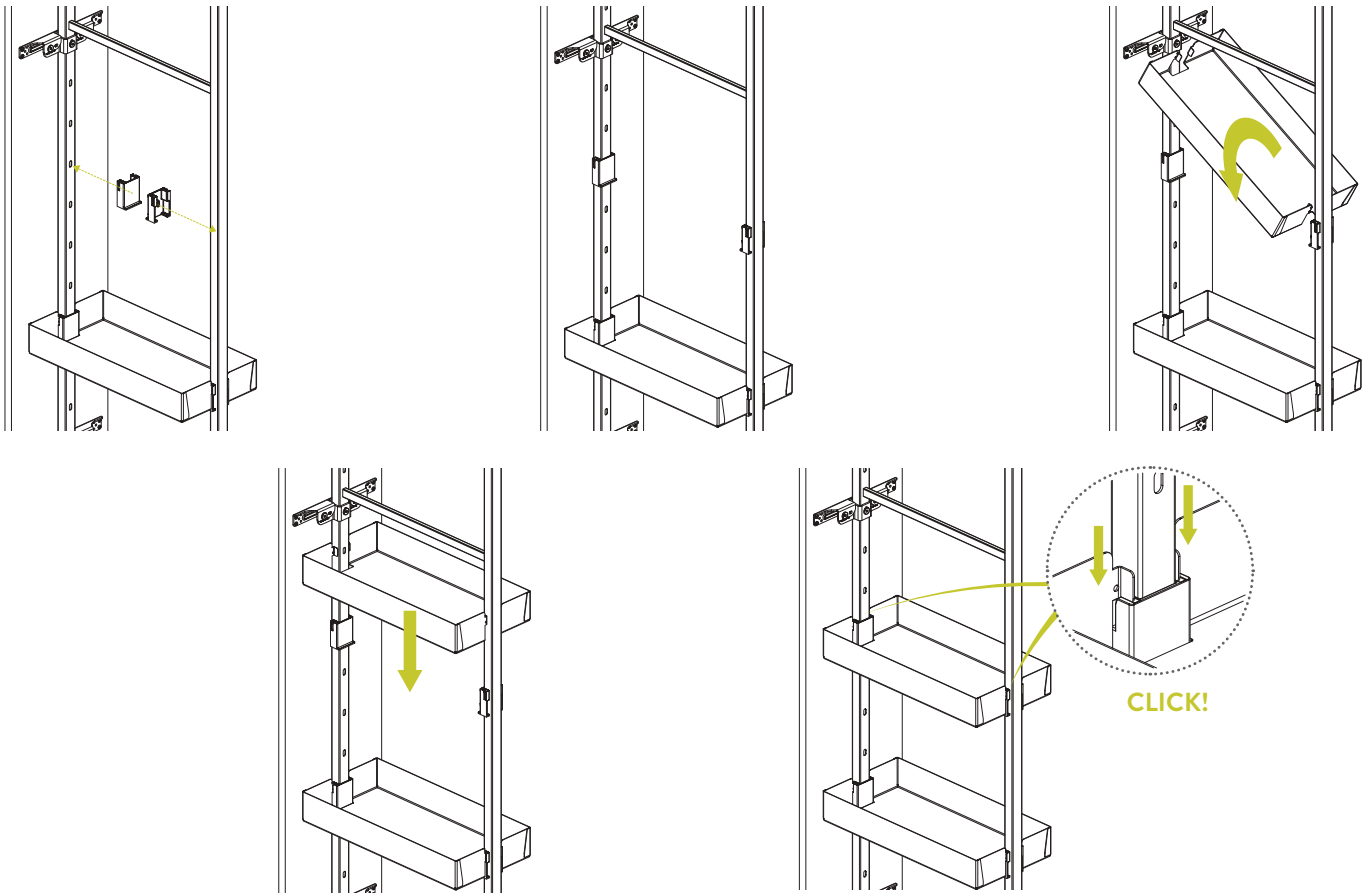


DISASSEMBLY

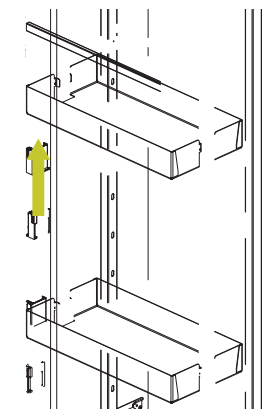


Infinity Baskets

ASSEMBLY

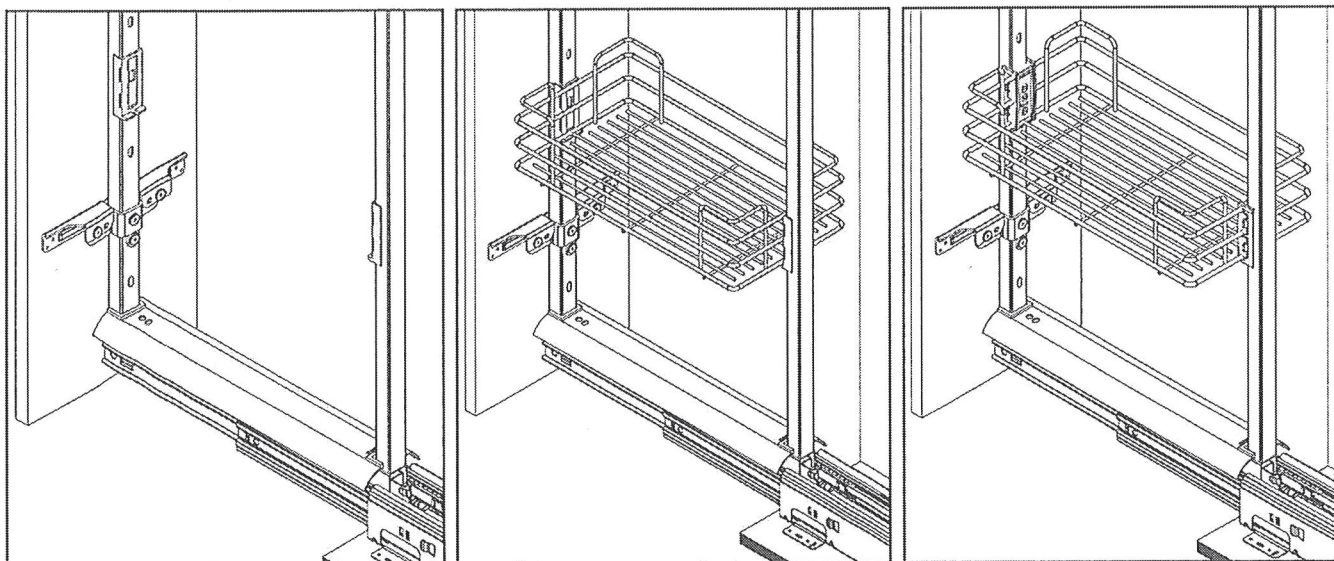

DISASSEMBLY

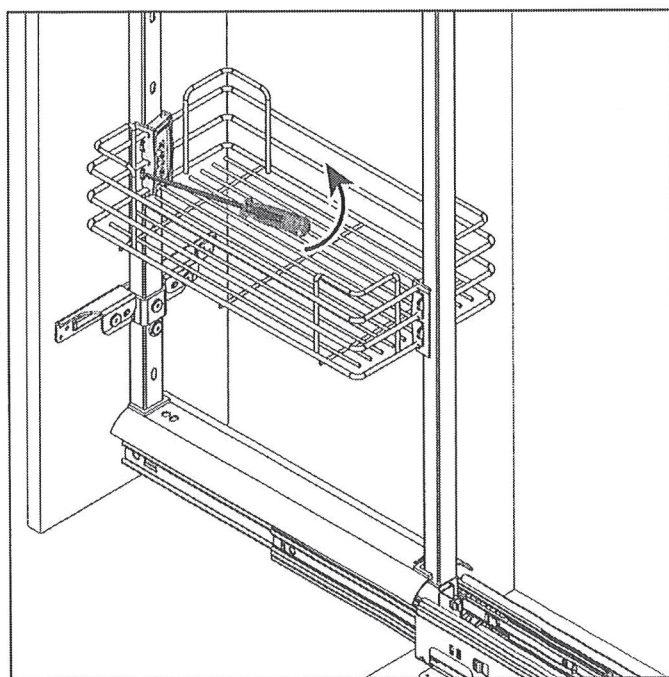

CONTACT US:

PHONE: 0508 365 674

EMAIL: sales@enko.nz

ADDRESS: 14 Winger Crescent, Kamo, Whangarei 0121

WEBSITE: www.enko.nz