


SOFT CLOSE HINGES

110° HINGE FULL OVERLAY

FEATURES

- 45 to 110 Angle
- Drilling Pattern 52/10
- 110 Opening Angle
- Depth of hinge cap 11.5mm
- Diameter of hinge cap 35mm
- Door thickness range 16-26mm
- Drilling distance on the door 3-6mm
- +2mm/-4mm side adjustment
- +2mm/-2mm cam adjustment up and down
- 26mm thick doors with standard hinge
- Easily fine tuned soft close adjustment for small doors
- Highly slam resistant

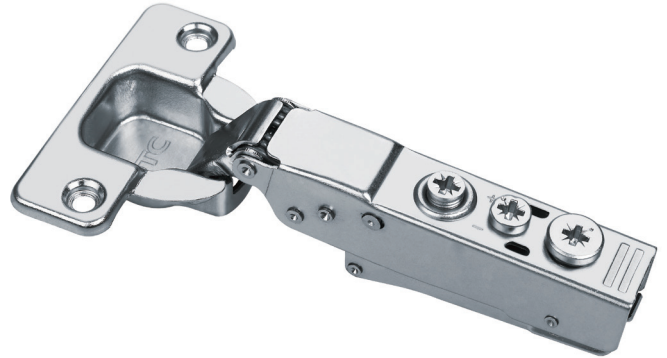


| Item Code | Item | Style | Unit |
|---------------|------------------|--------|------|
| C98A477M-SCQT | 110 Full Overlay | Q-Turn | Each |

110 STAINLESS STEEL SHALLOW CUP HINGE

FEATURES

- 35mm Diameter hole with a 10mm shallow cup depth
- Clip-on, full overlay with cam adjustment on hinge arm
- 304 grade Stainless Steel hinge & mounting plate
- 45mm drilling centres + Knock In 8mm dowel
- Includes 15.5mm 304 grade Stainless Steel mounting plate screws

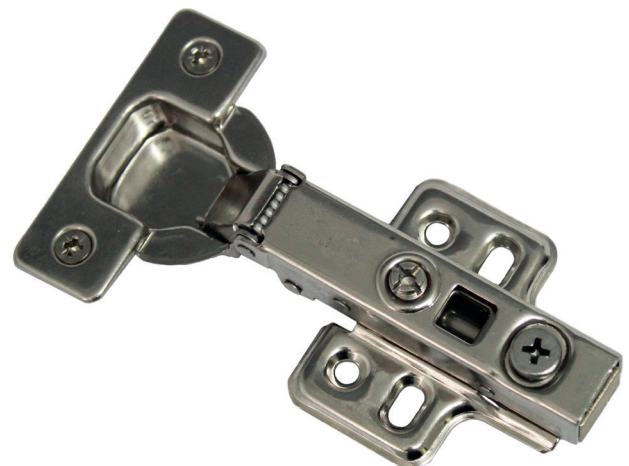

| Item Code | Item | Style | Unit |
|-----------|------------------------------|---------------------|------|
| C450027 | 110 Full Overlay Shallow Cup | Knock In with Mount | Each |

SOFT CLOSE HINGES

CORNER HINGE 45 CORNER DOOR

FEATURES

- 45 to 110
- 110 opening angle
- Drilling Pattern 52/10
- V Door Overlay
- Depth of hinge cap 11.5mm
- Diameter of hinge cap 35mm
- Door thickness range 16-26mm
- Drilling distance on the door 3-6mm




| Item Code | Item | Style | Unit |
|-------------|----------------|-------|------|
| C93E427M-SC | 45 Corner Door | Dowel | Each |

CORNER HINGE 90 BLIND CORNER

FEATURES

- 90 angle
- 110 opening angle
- Drilling Pattern 52/10
- Depth of hinge cap 11.5mm
- Diameter of hinge cap 35mm
- Door thickness range 16-26mm
- Drilling distance on the door 3-6mm

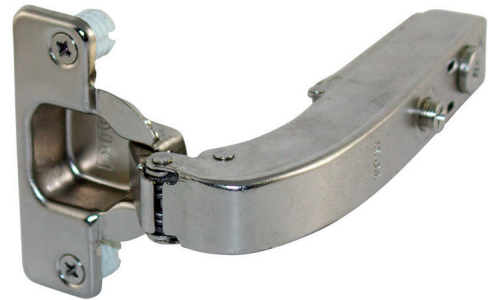


| Item Code | Item | Style | Unit |
|-------------|-----------------|-------|------|
| C93G427M-SC | 90 Blind Corner | Dowel | Each |

SCREW FIX MOUNTING PLATES

FEATURES

- Cam adjustable plates adjust height to +2/-2mm
- Euro Screw fix fixing
- 3 different size plates available

| Item Code | Item |
|-----------|------|
| H04AQ | 0mm |
| H24AQ | 2mm |
| H44AQ | 4mm |

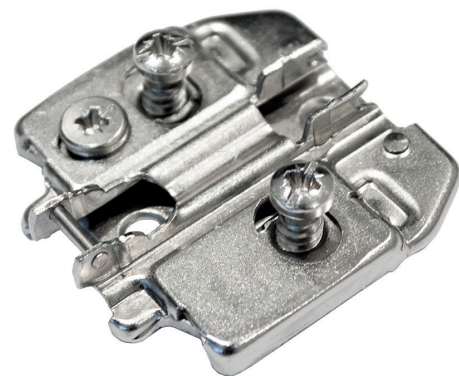

STANDARD HINGES

110° HINGE


FEATURES

- 45 to 110 Angle
- Drilling Pattern 52/10
- 110 Opening Angle
- Depth of hinge cap 11.5mm
- Diameter of hinge cap 35mm
- Door thickness range 16-26mm
- Drilling distance on the door 3-6mm
- Shallow cup depth
- +2mm/-4mm side adjustment
- +2mm/-2mm cam adjustment up and down
- 26mm thick doors with standard hinge


110 Full Overlay



110 Half Overlay

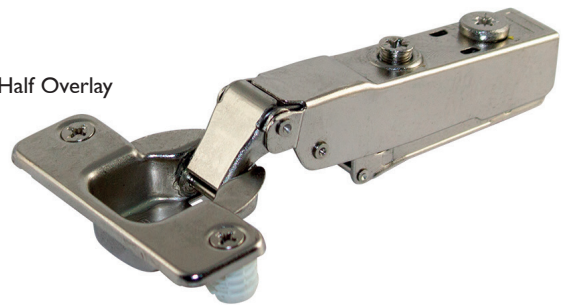

110 Inset

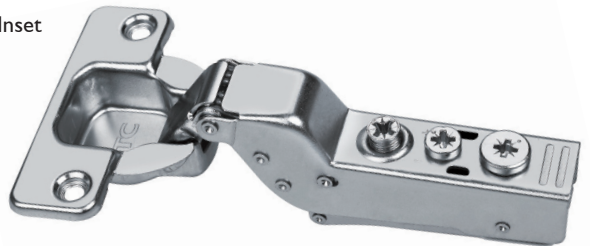

| Item Code | Item | Style | Unit |
|-----------|------------------|--------|------|
| C98A477M | 110 Full Overlay | Dowels | Each |
| C98B477M | 110 Half Overlay | Dowels | Each |
| C98C477M | 110 Inset | Dowels | Each |

165° HINGE

FEATURES

- 160 Opening Angle
- Drilling Pattern 52/10
- Depth of hinge cap 11.8mm
- Diameter of hinge cap 35mm
- Door thickness range 16-28mm
- Drilling distance on the door 3-6mm



| Item Code | Item | Style | Unit |
|-----------|------------------|--------|------|
| C93A507M | 165 Full Overlay | Dowels | Each |

STANDARD HINGES

CORNER HINGE 45 CORNER DOOR

FEATURES

- 45 to 110
- 110 opening angle
- Drilling Pattern 52/10
- V Door Overlay
- Depth of hinge cap 11.5mm
- Diameter of hinge cap 35mm
- Door thickness range 16-26mm
- Drilling distance on the door 3-6mm



| Item Code | Item | Style | Unit |
|-----------|----------------|-------|------|
| C93E427 | 45 Corner Door | Dowel | Each |

CORNER HINGE 90 BLIND CORNER

FEATURES

- 90 angle
- 110 opening angle
- Drilling Pattern 52/10
- Depth of hinge cap 11.5mm
- Diameter of hinge cap 35mm
- Door thickness range 16-26mm
- Drilling distance on the door 3-6mm



| Item Code | Item | Style | Unit |
|-----------|-----------------|-------|------|
| C93G427M | 90 Blind Corner | Dowel | Each |

SCREW FIX MOUNTING PLATES

FEATURES

- Cam adjustable plates adjust height to +2/-2mm
- Euro Screw fix fixing
- 3 different size plates available

| Item Code | Item |
|-----------|------|
| H04AQ | 0mm |
| H24AQ | 2mm |
| H44AQ | 4mm |

